
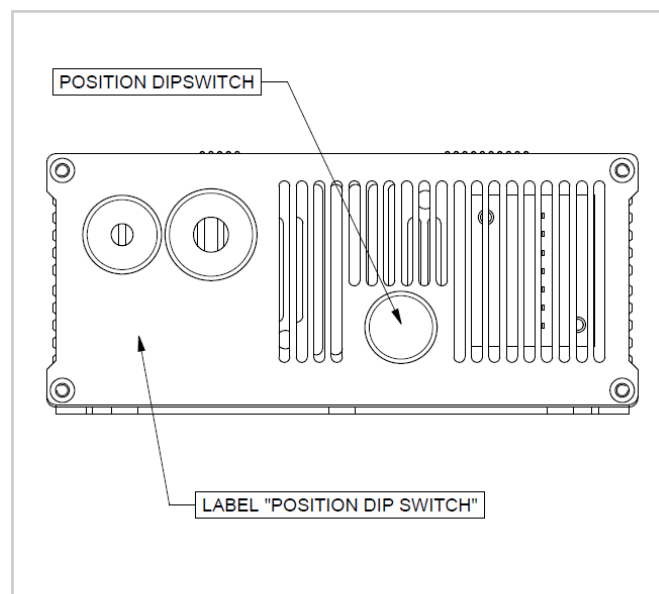


Hurricane Series – Charger Settings

Document #: IO-20015
Reference Document: N/A
Date of Issue: 05/05/2026
Applicable Equipment: Hurricane 400 XTT
Applicable Part/Kit#: 3BACA00337

DESCRIPTION:

Charger settings for 24V/15A charger on Hurricane 400 XTT

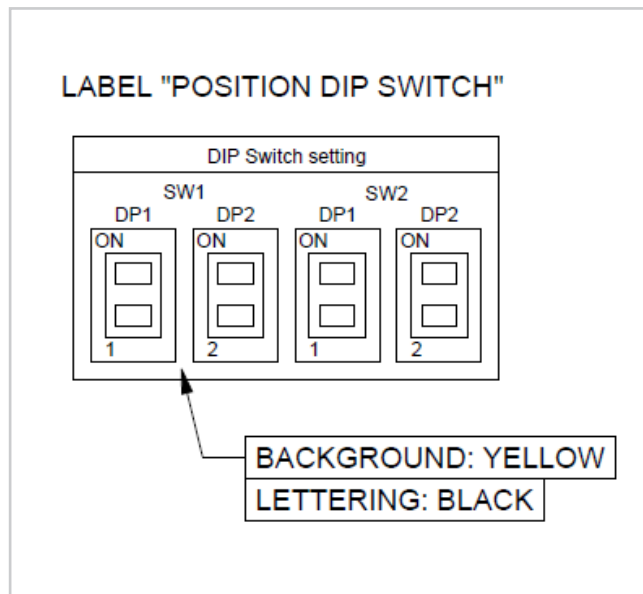

LABEL "SETTING CHARGING CURVE"

CHARGING CURVE	DEFAULT SETTING	DIP SWITCH 1		DIP SWITCH 2		CURRENT SETTING	STARTING LED BLINKING
		DP1	DP2	DP1	DP2		
WUla Wet Generic		ON			ON		2 BLINKS RED LED
			OFF	OFF			
WUoU Gel/AGM Generic			ON		ON		2 BLINKS YELLOW LED
		OFF		OFF			
WUIUo Exide Sonnenschein					ON		2 BLINKS GREEN LED
		OFF	OFF	OFF			
WUIUo AGM Discover	X	ON	ON		ON		2 BLINKS RED+YELLOW LED
				OFF			
WUla Chilwee AGM		ON					4 BLINKS RED LED
			OFF	OFF	OFF		
WUa Lithium Inventus			ON				4 BLINKS YELLOW LED
		OFF		OFF	OFF		
WUa Lithium Exide							4 BLINKS GREEN LED
		OFF	OFF	OFF	OFF		